



WALL THICKNESS DISTRIBUTION


PVC
250 μm

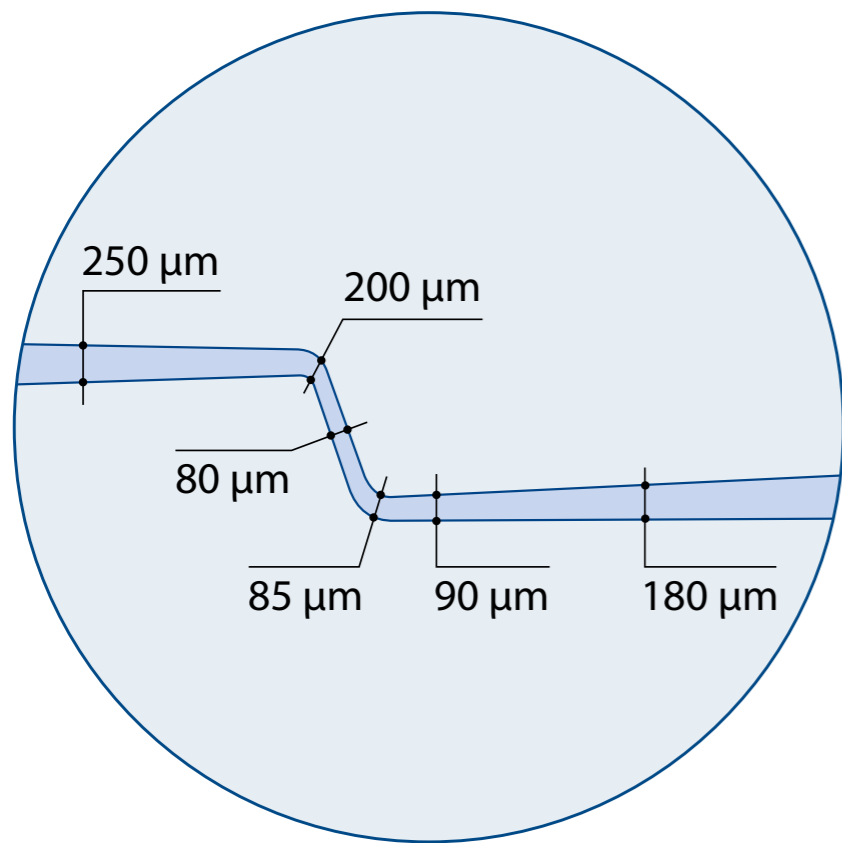

PVC/PVDC
250 μm / 40 g/m^2

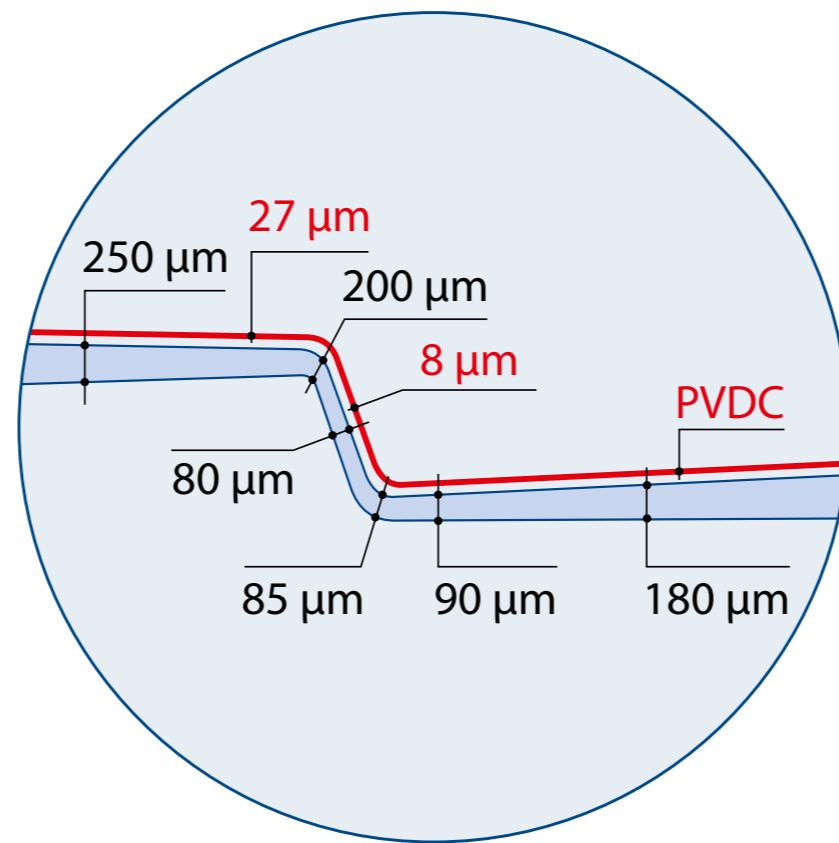


Purelay[®]
250 μm

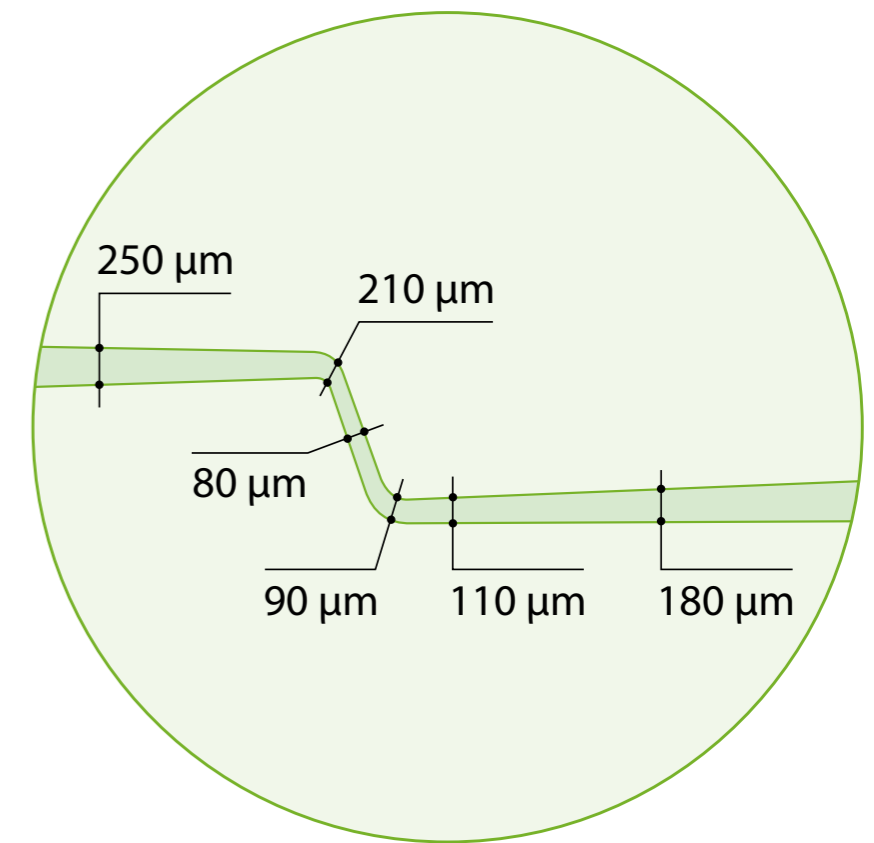


The graphs show the cross-section of a blister from the side.




WATER VAPOR ABSORPTION – TIME

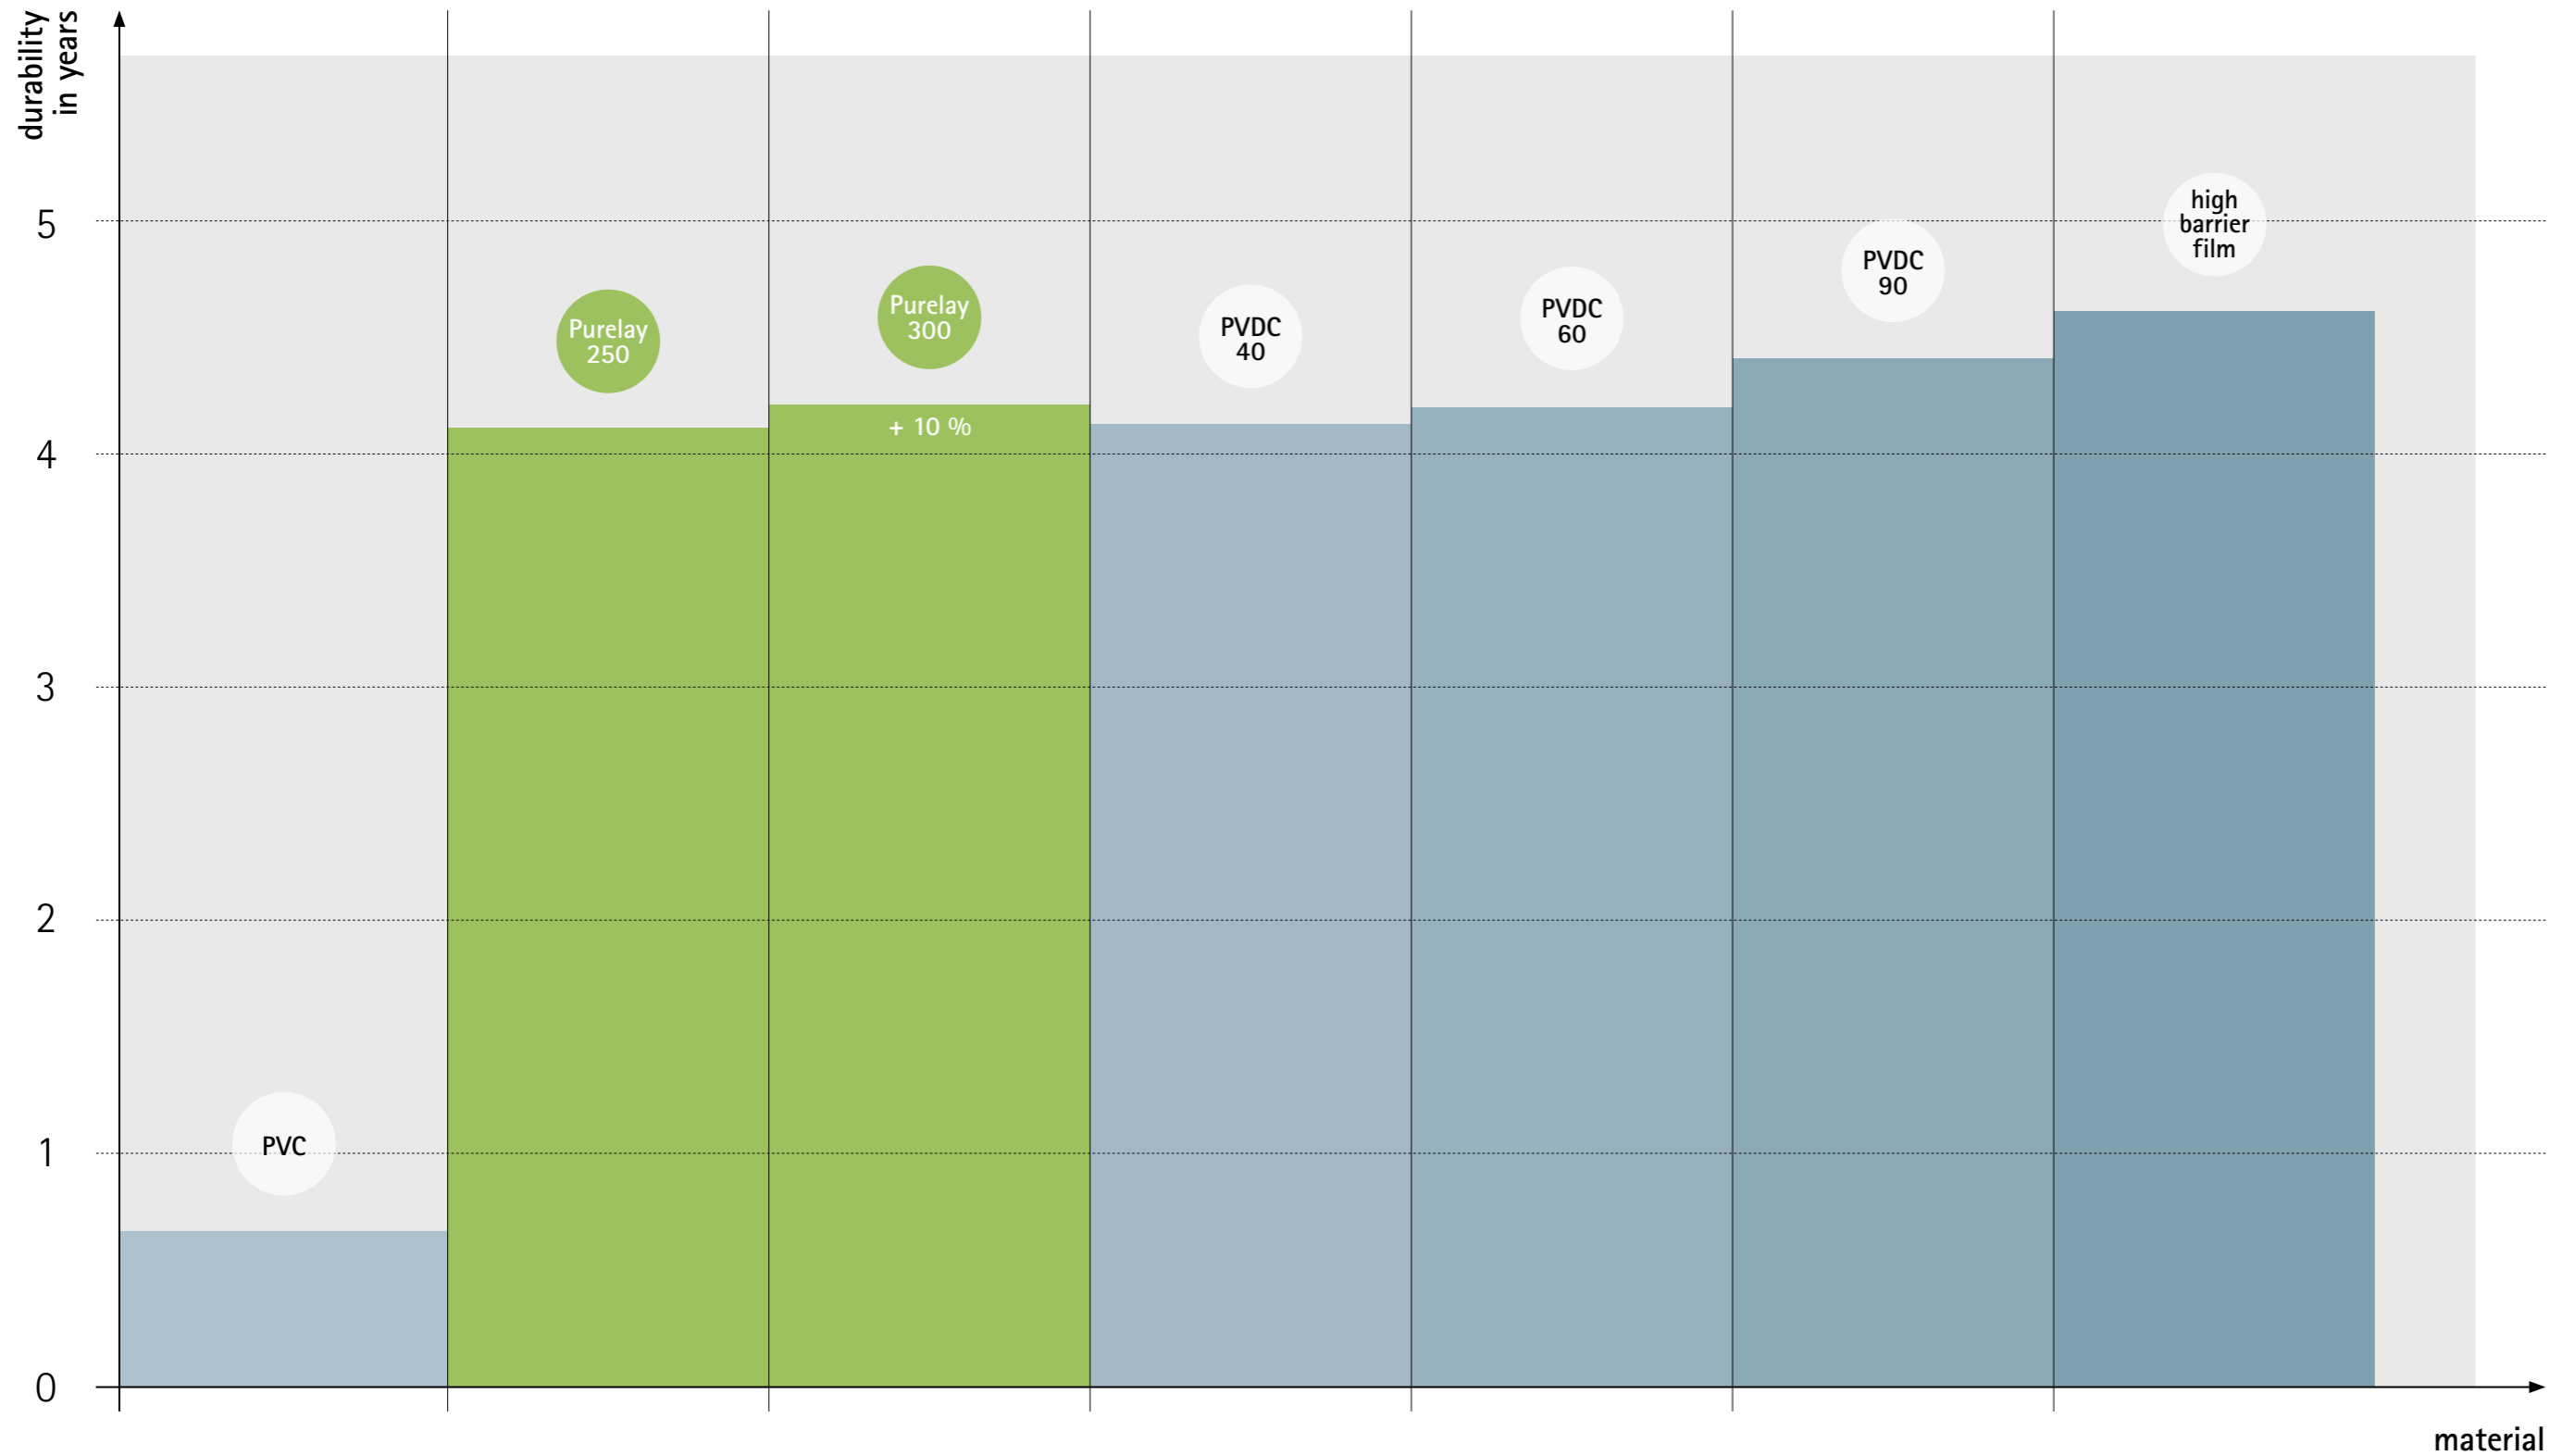

COSTS – MATERIAL

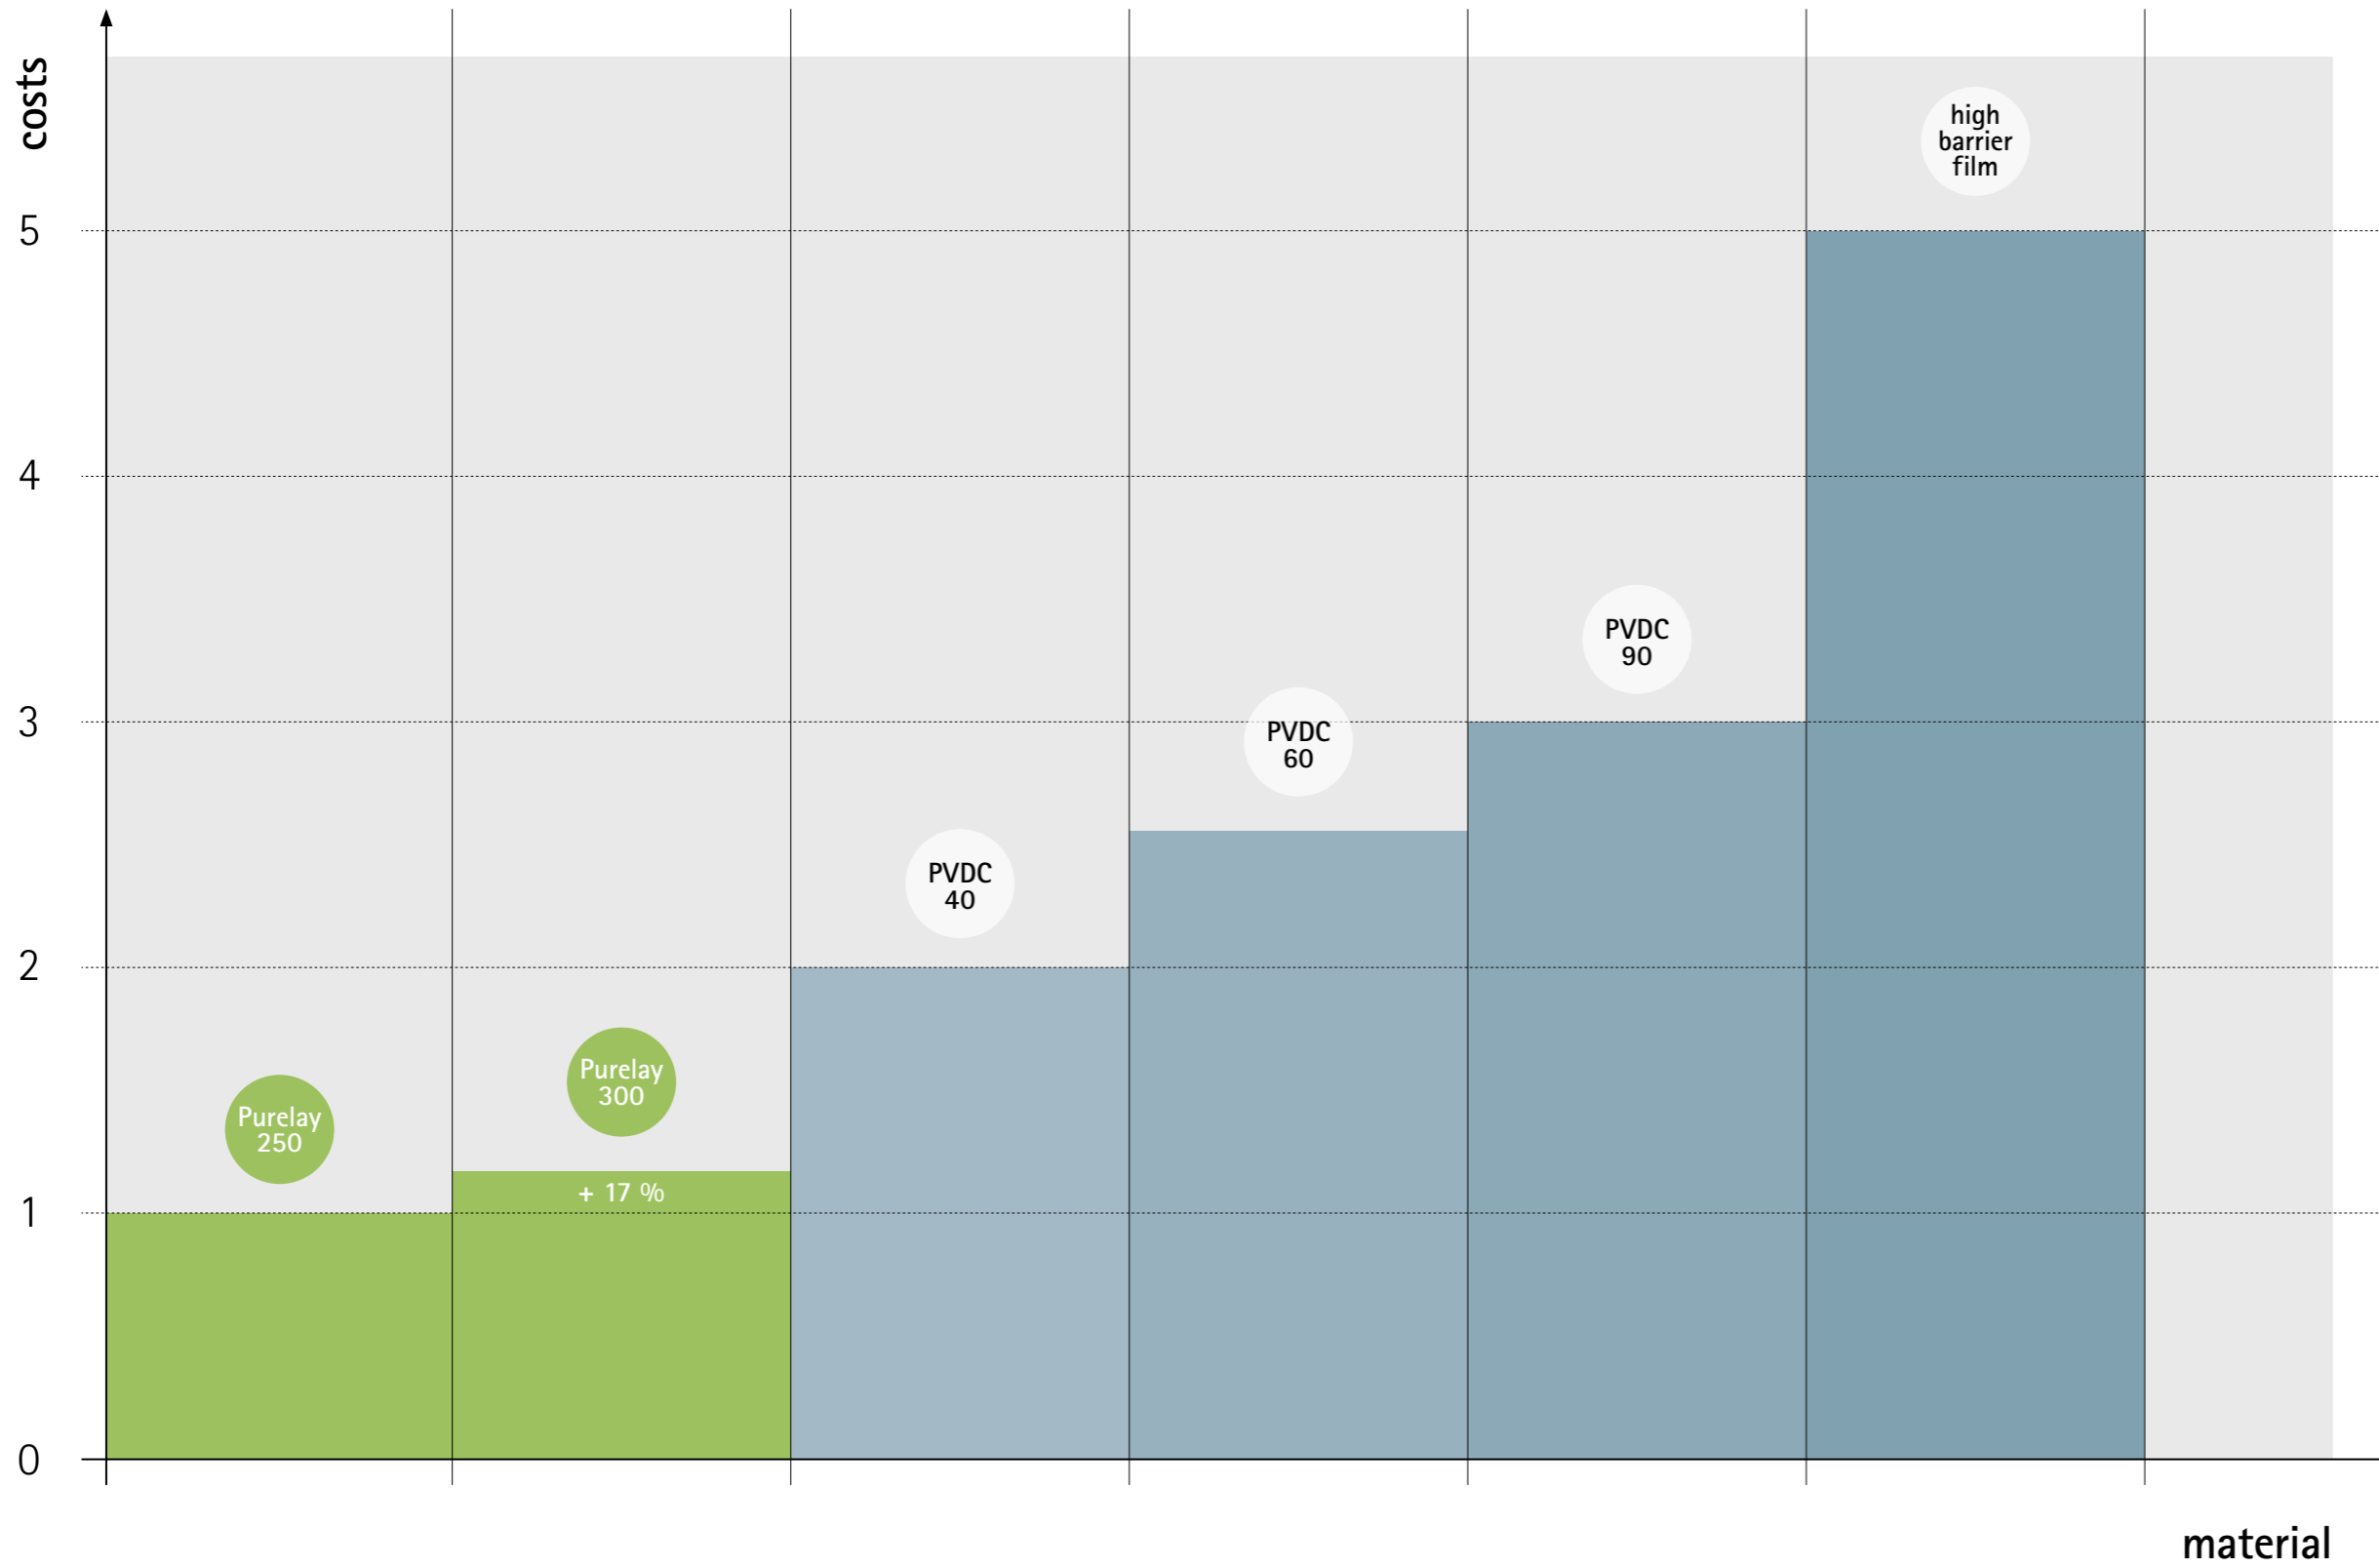


YIELD OF FILM BASED ON WEIGHT

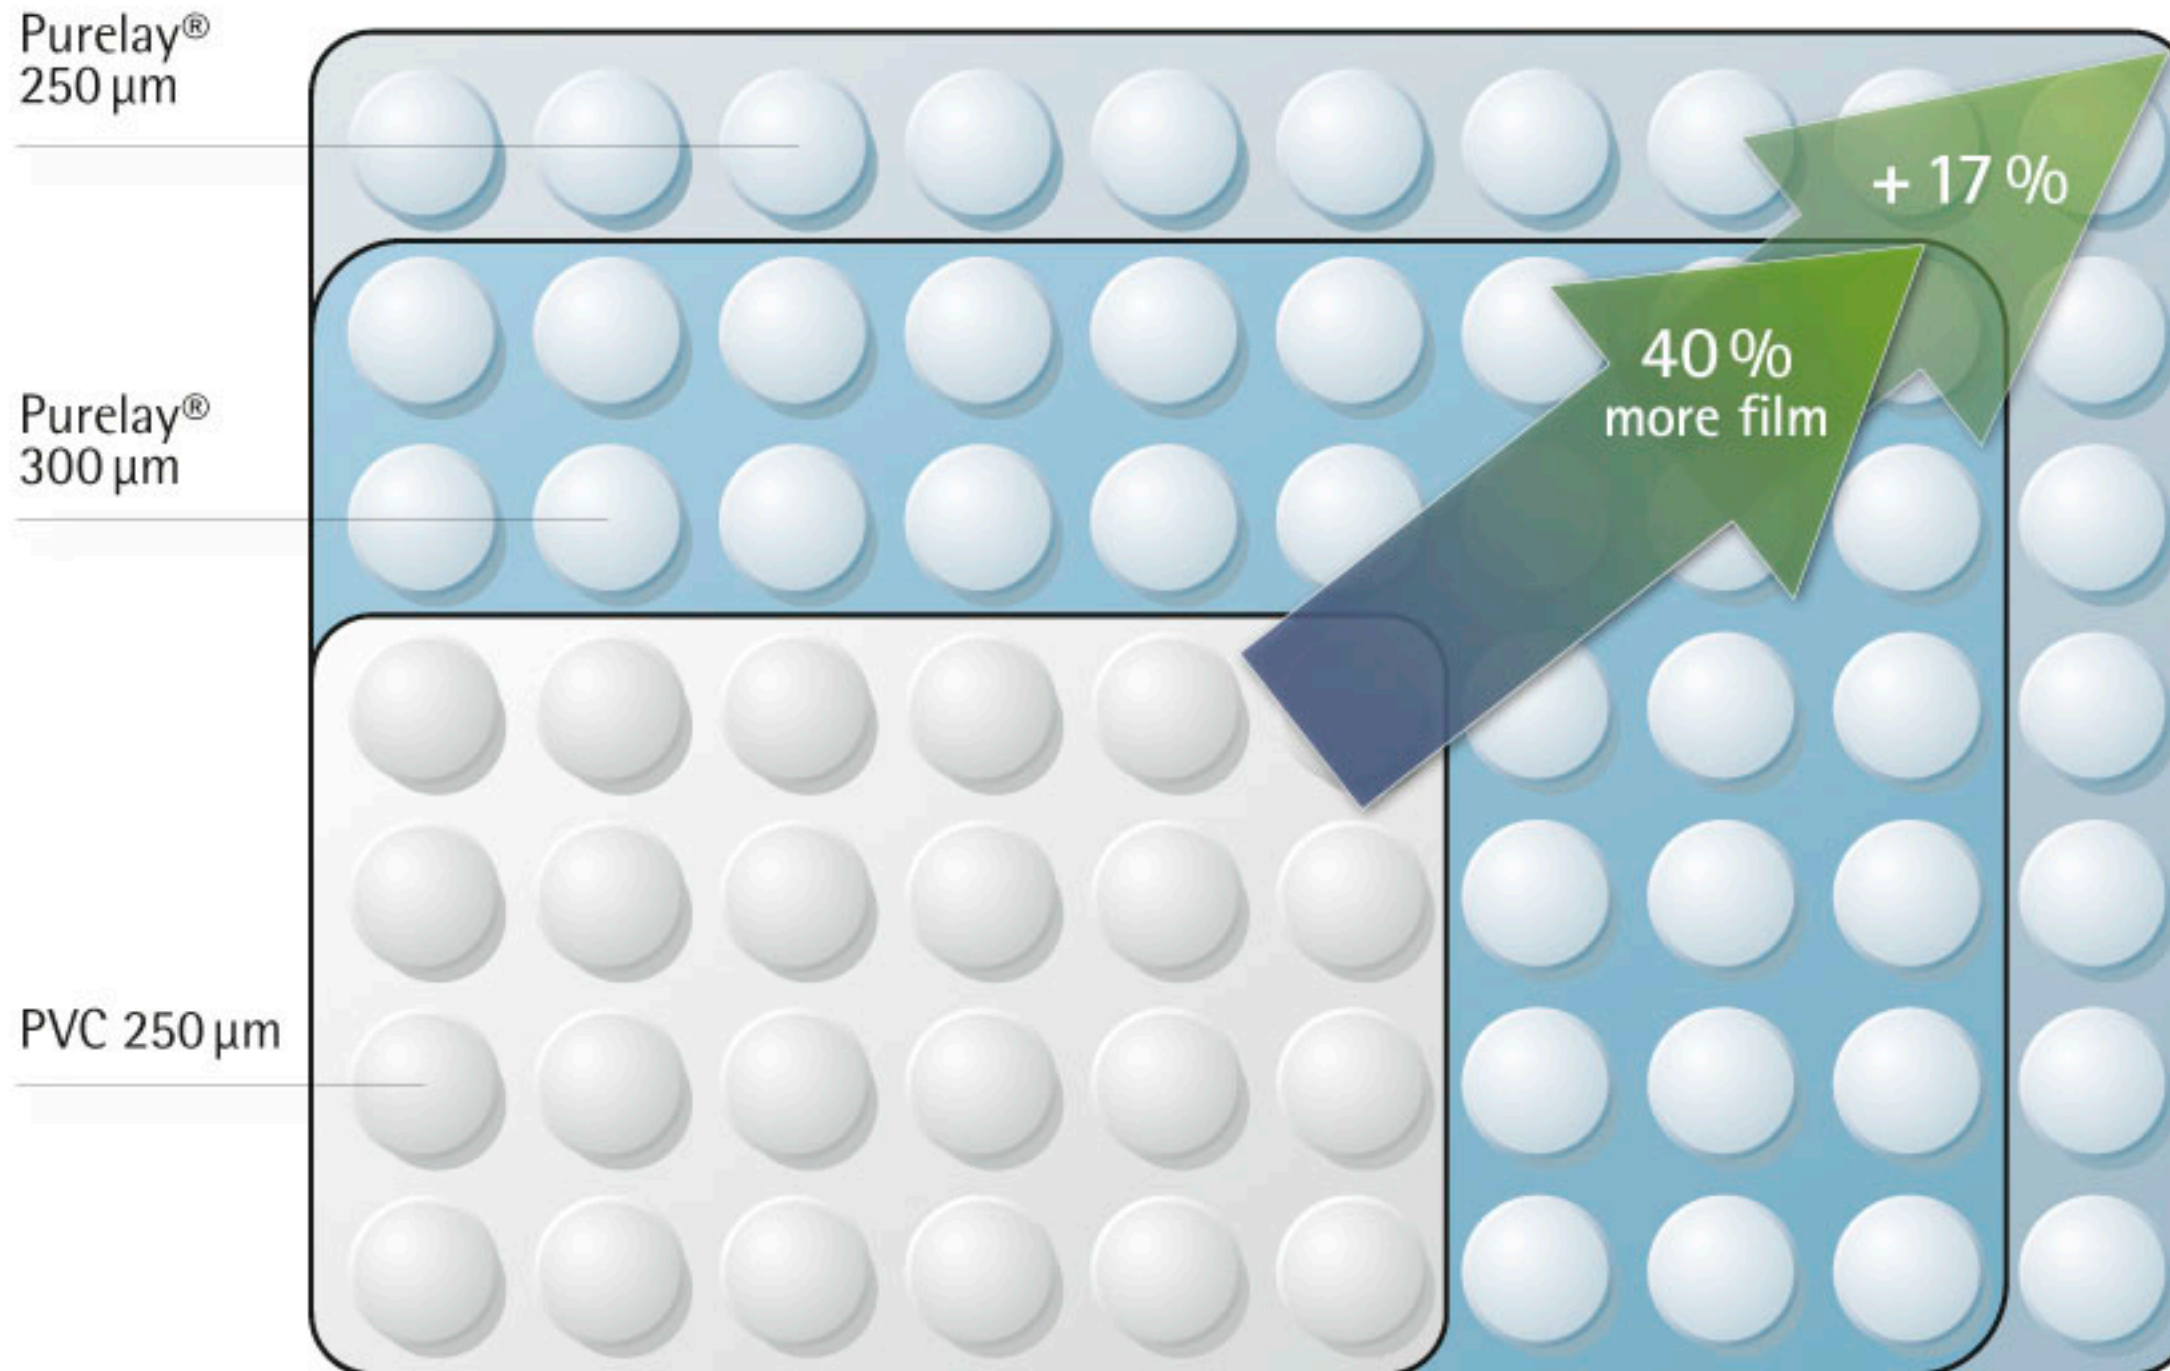

specific weight PP
0,9 g/cm³

specific weight PVC
1,35 g/cm³ and more

BARRIER – COSTS

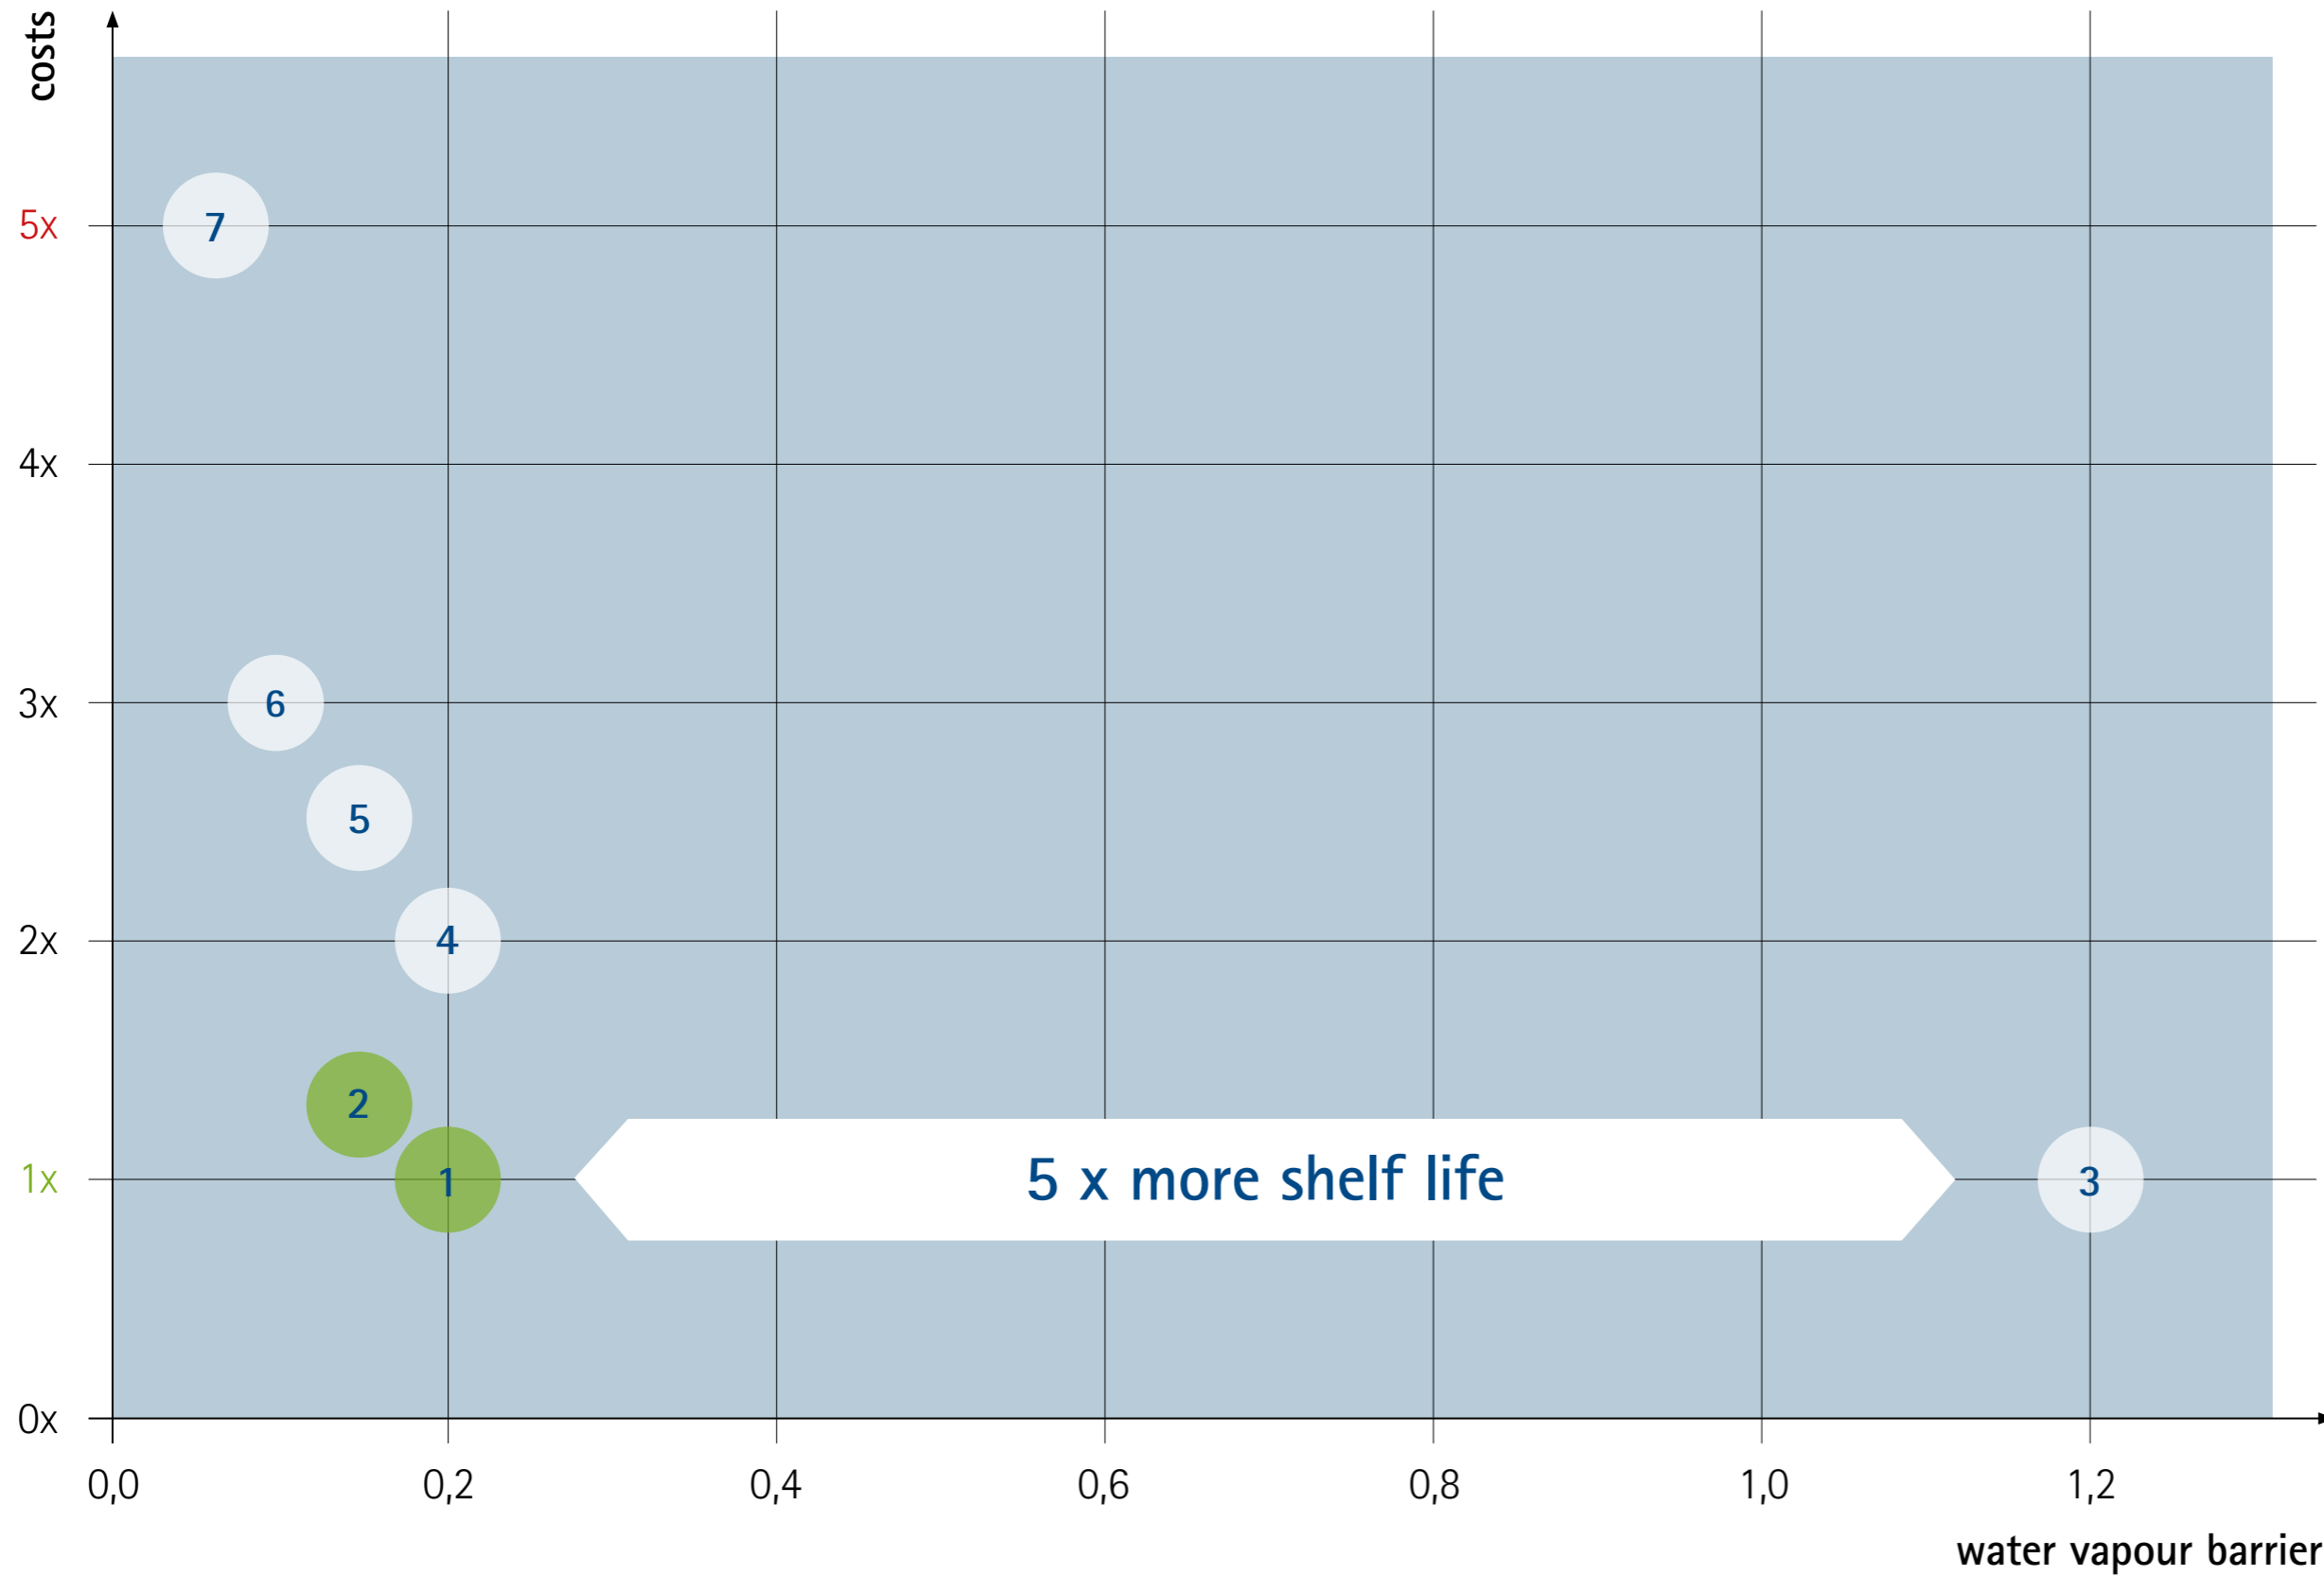

- 1 Purelay® 250 µm
- 2 Purelay® 300 µm
- 3 PVC 250 µm
- 4 PVC 250 µm / PVdC 40 g/m²
- 5 PVC 250 µm / PVdC 60 g/m²
- 6 PVC 250 µm / PVdC 90 g/m²
- 7 high barrier film